

**OPTIONS**

**Flush Volume**

- 1.6 gpf (6.0 Lpf) (1.6)
- 1.28 gpf (4.8 Lpf) (1.28)
- 1.1 gpf (4.2 Lpf) (1.1)

**Power Type**

- Battery
- Hardwired

**Water Efficiency**

- High Efficiency
- Low Consumption

**Bypass**

- Dual-Filtered Fixed Bypass Diaphragm

**Override**

- True Mechanical (TMO)

**Control Stop**

- 1"
- Less (L/STOP)

**Inlet**

- 1"

**Vacuum Breaker**

- Less (XYV)

**Adapter**

- Cast Set Screw Wall Flange (YBC)

**Bumper**

- Angle Stop (YO)


**Compliances & Certifications**

- ADA Compliant
- BAA Compliant
- BABAA Compliant
- cUPC Certified
- UPC Certified
- Satisfies LEED Credits
- cUPC Green Certified
- WaterSense Listed
- BREEAM Water Credit
- Green Globes Water Credit

**NOTES**

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

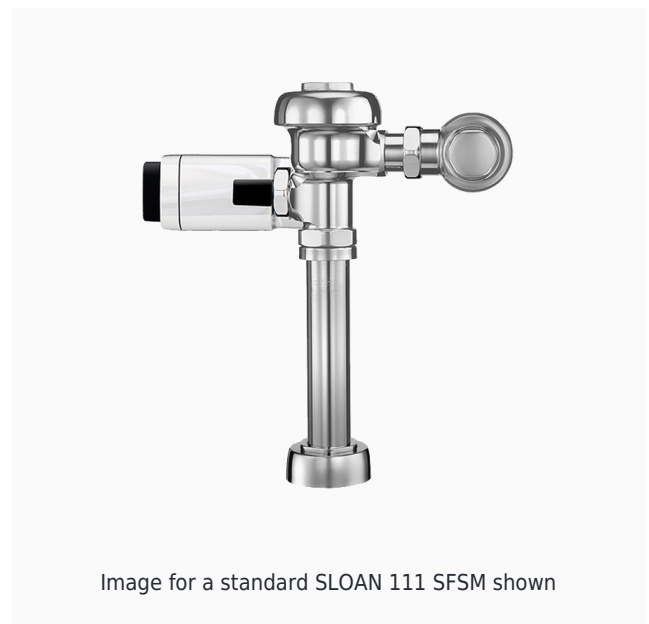

**DESCRIPTION**

Sloan® Exposed Sensor Water Closet Flushometer

**FEATURES**

- Flush volumes start as low as 1.6 gpf/6.0 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents toilet from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandal-resistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece to accommodate different height requirements
- High chloramine resistant PERMEX synthetic rubber diaphragm with Linear Filtered Bypass and Vortex Cleansing Action
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

**DOWNLOADS**

- [Sloan Exposed Installation Instructions](#)
- [EL-700/750-A Installation Instructions](#)
- [Sloan Exposed \(Spanish\) Installation Instructions](#)
- [EBV-500/550-A Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)

**Sloan 10500 Seymour Ave, Franklin Park, IL 60131**

Phone: 800.982.5839 • Fax: 800.447.8329 • [sloan.com](http://sloan.com)

- [Tail Piece Repair and Maintenance Guide](#)
- [Sloan Flushometer Repair and Maintenance Guide](#)
- [EBV500/EBV550 Repair and Maintenance Guide](#)
- [Additional Downloads](#)