

OPTIONS**Power Type**

Hardwired

Body Type

Low

Mounting

Deck

Power Supply

Plug Adapter (PLG)

Sensor Type

Infrared

Flow Rate

0.5 gpm (1.9 Lpm) (0.5GPM)

0.35 gpm (1.3 Lpm) (0.35GPM)

Spray Type

Multi-Laminar (MLM)

Spout Type

Pedestal

Trim Plate

4" (102mm) (4)

Finish

Polished Chrome (CP)

Control Access

Below Deck

Mixer

Back-Check Tee (TEE)

Below Deck Manual Mixing Valve (BDM)

Special Features

Battery Backup

Compliances & Certifications

ADA Compliant

ASME A112.18.1 Compliant

CEC Compliant

CalGreen Compliant

IAPMO

NSF-61

NYC604.4

Proposition 65

TAS

UPC Certified

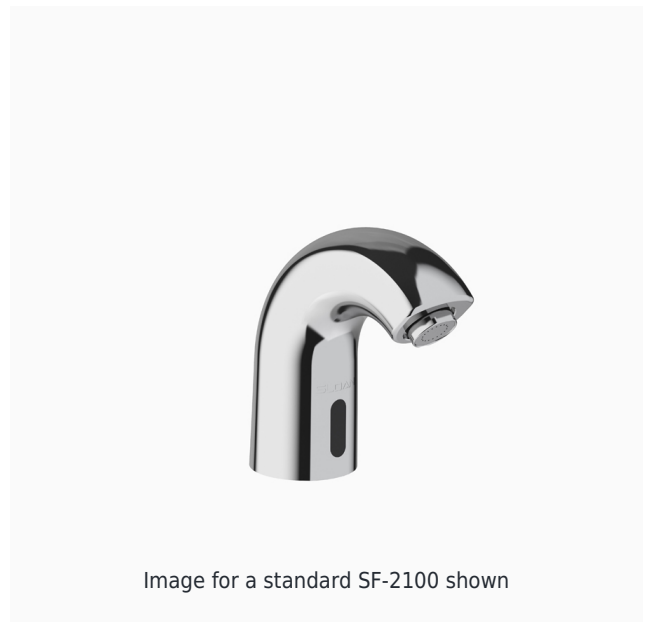


Image for a standard SF-2100 shown

DESCRIPTION

Sloan® Hardwired-Powered Deck-Mounted Low Body Faucet

FEATURES

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Brass Pedestal Hand Washing Faucet with the following features:

- Adjustable Infrared Sensor Range
- 36" (914 mm) Long Sensor Cable
- 24" (610 mm) Long Flex Hose
- Filtered Solenoid Valve with serviceable Strainer Filter
- Includes Four (4) AA-size Batteries
- Includes appropriate Mounting Hardware
- 1 Year limited warranty

DOWNLOADS

- [SF Series Installation Instructions](#)
- [SF Series \(FR\) Installation Instructions](#)
- [SF Series \(SP\) Installation Instructions](#)
- [SFP 35-A Installation Instructions](#)
- [SF 2100/2150 Faucet Extension Installation Instructions](#)
- [Trim Plate Guide](#)
- [Faucet Spray Heads Repair and Maintenance Guide](#)
- [SF-2100/2150 and SF-2200/SF-2250 Repair and Maintenance Guide](#)
- [Additional Downloads](#)

VIDEOS

- [SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450 Parts Breakdown](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

[Find a matching soap dispenser](#) for this faucet.

[Find a compatible sink](#) for this faucet.

-  SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450
Module Replacement
-  SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450
Battery Replacement- Sensor Range Adjustment