

CODE NUMBER

3917906

DESCRIPTION

1.6 gpf, Rough Brass Finish, Fixture Connection Not Included, Single Flush, Metal Button Panel Mount Push Button, Royal® Concealed Manual Specialty Water Closet Hydraulic Flushometer.

DETAILS

• Flush Volume: 1.6 gpf (6.0 Lpf)

Finish: Rough BrassValve: Diaphragm

• Valve Body Material: Semi-red Brass

Fixture Type: Water Closet
Fixture Connection: Not Included
Supply Pipe: 1" (25mm)

• Push Button: Metal Button Panel Mount (MBPM)

FEATURES

- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- 1" female I.P.S. union outlet (no flush connection)
- Dual Filtered Bypass Diaphragm
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Includes HY108A Push Button Assembly



COMPLIANCES & CERTIFICATIONS











(ADA Compliant, BAA Compliant, BABAA Compliant, cUPC Certified, UPC Certified)

RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

VALVE OPERATING PRESSURE (FLOWING)

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

DOWNLOADS

- Royal/Regal Series 900 Hydraulic Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Series 900 Flushometers Repair and Maintenance Guide
- Hydraulic Push Button Options
- Additional Downloads

NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the ROYAL 950 product? View the general spec sheet with all options.


Find a compatible urinal for this flushometer.
Find a compatible water closet for this flushometer.

WARRANTY

View Warranty Information



ROUGH-IN

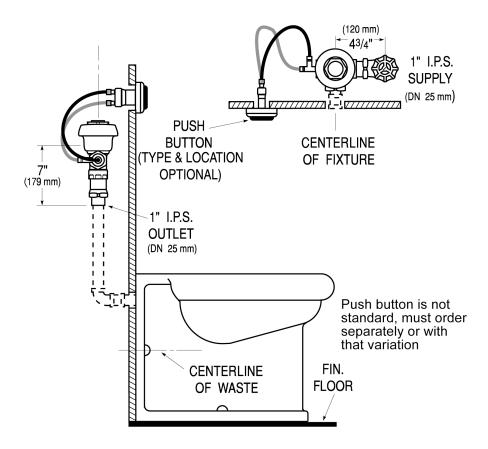

NOTE: Flush Connections Shown in Dotted Lines Not Included.