

#### **CODE NUMBER**

3362189IN

## **DESCRIPTION**

4" Trim Plate, Plug Adapter Power Supply, Back-Check Tee, Polished Chrome Finish, 0.5 gpm, Aerated Spray, Infrared Sensor, Sloan® Hardwired-Powered Deck-Mounted Mid Body Faucet.

#### **DETAILS**

• Flow Rate: 0.5 gpm (1.9 Lpm) (0.5GPM)

Spray Type: Aerated (AER)
Sensor Type: Infrared
Mounting Type: Single Hole
Trim Plate: 4" (102mm) (4)

Power Supply: Plug Adapter (PLG)Temperature Mixer: Back-Check Tee (TEE)

Finish: Polished Chrome (CP)

Factory Default Timeout: 30 secondsFactory Default Gallons per Cycle: 0.25

#### **FEATURES**

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Brass Pedestal Hand Washing Faucet with the following features:

- Adjustable Infrared Sensor Range
- 36" (914 mm) Long Sensor Cable
- 24" (610 mm) Long Flex Hose
- Filtered Solenoid Valve with serviceable Strainer Filter
- Includes Four (4) AA-size Batteries
- Includes appropriate Mounting Hardware

### **ELECTRICAL SPECIFICATIONS**

• Battery Life: 2 years 8,000 cycles/month

• Sensor Range: 4"-7" (102-178mm)

• Timeout Adjustment Settings: 30s

## **VIDEOS**

SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450 Parts Breakdown


SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450 Module Replacement

SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450
Battery Replacement- Sensor Range Adjustment

## **DOWNLOADS**

- SF Series Installation Instructions
- SF Series (FR) Installation Instructions
- SF Series (SP) Installation Instructions
- SFP 35-A Installation Instructions
- Trim Plate Guide
- SF-2400/2450 Repair and Maintenance Guide
- Additional Downloads





# **COMPLIANCES & CERTIFICATIONS**



















(ADA Compliant, ASME A112.18.1 Compliant, cUPC Certified, cUPC Low Lead Compliant, IAPMO, NSF-61, Proposition 65, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

# NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the SF-2400 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com






# **WARRANTY**

View Warranty Information




# **ROUGH-IN**

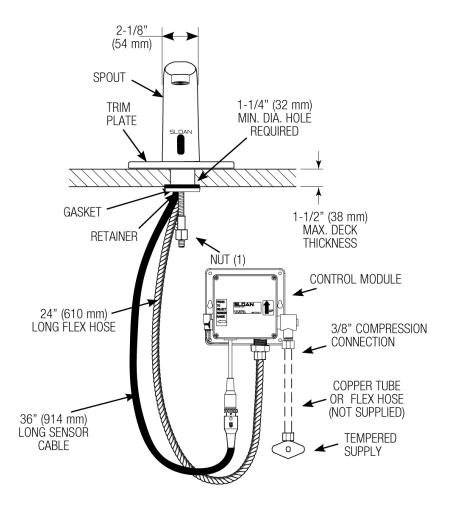

# HOT AND COLD WATER SUPPLY APPLICATIONS

(SPECIFY IN MODEL VARIATION)



Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com