

### **CODE NUMBER**

3917906

### **DESCRIPTION**

1.6 gpf, Rough Brass Finish, Fixture Connection Not Included, Single Flush, Metal Button Panel Mount Push Button, Royal® Concealed Manual Specialty Water Closet Hydraulic Flushometer.

### **DETAILS**

• Flush Volume: 1.6 gpf (6.0 Lpf)

Finish: Rough BrassValve: Diaphragm

• Valve Body Material: Semi-red Brass

Fixture Type: Water ClosetFixture Connection: Not Included

• Supply Pipe: 1" (25mm)

• Push Button: Metal Button Panel Mount (MBPM)

### **FEATURES**

- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- 1" female I.P.S. union outlet (no flush connection)
- Dual Filtered Bypass Diaphragm
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Includes HY108A Push Button Assembly



### **COMPLIANCES & CERTIFICATIONS**











(ADA Compliant, BAA Compliant, BABAA Compliant, cUPC Certified, UPC Certified)

### RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

# **VALVE OPERATING PRESSURE (FLOWING)**

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

## **DOWNLOADS**

- Royal/Regal Series 900 Hydraulic Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Series 900 Flushometers Repair and Maintenance Guide
- Hydraulic Push Button Options
- Additional Downloads

### NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the ROYAL 950 product? View the general spec sheet with all options.

Find a compatible urinal for this flushometer.
Find a compatible water closet for this flushometer.


### WARRANTY

View Warranty Information

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



## **ROUGH-IN**

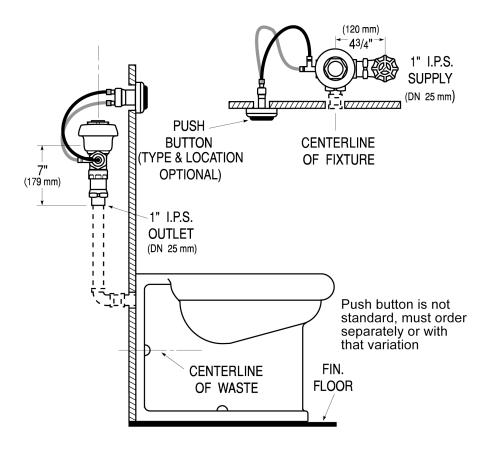

NOTE: Flush Connections Shown in Dotted Lines Not Included.